

COMMERCIAL KITCHEN EQUIPMENT



Showcase



Baking Equipment



Food Machinery



Steaming Cabinet



Disinfection




Dishwashers



Refrigeration



RE- FRIDGE

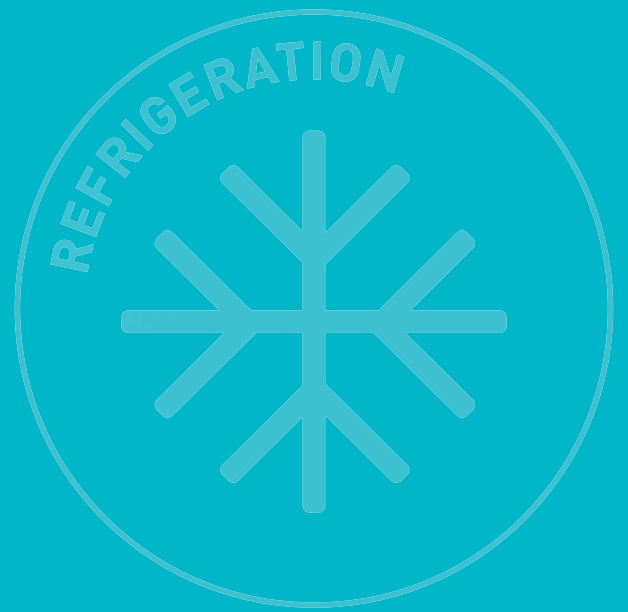

KEEP IT FRESH PROFESSIONAL DESIGN

The Meichu Refrigeration series is an indispensable equipment in the kitchen. It is professionally designed for different kitchens and different foods, so that it can be better preserved and used. Rich specification selection, so that every kitchen can find the right equipment here, if there are special needs, we can also provide non-standard customization.

RATION

SERIES

meichu® | COOIMES®

VENTILATED

Features

No welding and polishing on exterior surface of unit.

43°C ambient temperature.

Door gasket is easy to take off for cleaning and replacement.

High density insulation, 40KG/m³ CFCs free, up to 75mm thickness of the insulation for cabinet, 60mm for counter.

Standard GN size shelf

Wide round edges and corners for cleaning.

Monoblock Cooling System, easy to take off for repairing and cleaning.

Reversible and self-closing door.

Draining system inside for defrosting water.


High-speed fan motor ensures the cooled air can be blown to everywhere inside.

Digital thermostat with temperature display, precisely set temperature for foods.

Defrosting system by time and temperature automatically.

Heated door frame to avoid water condensation.

Options: Adjustable feet / Castor; AISI 201 stainless steel / AISI 304 stainless steel; 220V/50Hz . 220V/60Hz . 110V/60Hz; Lock & key.



Monoblock Cooling System for Cabinet

Fast cooling and high efficiency Save more space incabinet,and easy maintenance and cleaning.



Monoblock Cooling System for Counter

Fast cooling and high efficiency. Save more space in cabinet,and easy maintenance and cleaning.



Digital Controller

Precise control and display the temperature of food based on user demand.



External LED Lamp for cabinet

The lamp is provided as standard.



Flat Inner Top

More space for storage.More reasonable air circulation inside.



Strong Magnetic Gasket

Removable gasket for cleaning and replacement.



Shelf and Guide

The height of shelves is adjustable due to the size of stored products.



Reversible&Self-Closing Door

Thicken door handle with end cover easy reverse for left hand.



Round Edge and Corner

Food residual and water can be easily deaned to reduce bacteria and guarantee the safety of food.



Adjustable Bullet Feet

Range 130-200mm.



Drawer Kits 1/2x200 and 1/3x150

Flexible and practical exchange of drawer kits and doors. It is optional.



Castor with Brake

It is optional.

VENTILATED

GN1.2 CABINET GN2/1




GN1.2TN2
GN1.2BT2

GN1.2TN4
GN1.2BT4

GN1.2TNG2
GN1.2BTG2

GN1.2TNG4

Model No.		GN1.2TN2	GN1.2BT2	GN1.2TN4	GN1.2BT4	GN1.2TNG2	GN1.2BTG2	GN1.2TNG4
Cooling Type		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Defrosting Type		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Capacity	[L]	1220	1220	1220	1220	1220	1220	1220
Exterior Dimension								
Width	[mm]	1400	1400	1400	1400	1400	1400	1400
Depth	[mm]	820	820	820	820	820	820	820
Height	[mm]	2050	2050	2050	2050	2050	2050	2050
Temperature Range	[°C]	10~-2	-18~-22	10~-2	-18~-22	10~0	-15~-18	10~0
Ambient Temperature	[°C]	43 T	43 T	43 T	43 T	32N	32N	32N
Refrigerant		R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials		AISI304/AISI201						
Door Quantity		2	2	4	4	2	2	4
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ						



VENTILATED GN1/1 COUNTER



AWR900



AWF900




AWR1350L2 / AWF1350L2



AWR1350G

Model No.	AWR900	AWF900	AWR900G	AWR1350L2	AWF1350L2	AWR1350G	AWR1500L2	AWF1500L2	AWR1500G
Cooling Type	Ventilated								
Defrosting Type	Automatic								
Capacity [L]	175			260			360		
Exterior Dimension									
Width [mm]	900	900	900	1350	1350	1350	1500	1500	1500
Depth [mm]	700	700	700	700	700	700	800	800	800
Height [mm]	850	850	850	850	850	850	850	850	850
Temp. Range [°C]	10~-2	-18~-22	10~0	10~-2	-18~-22	10~0	10~-2	-18~-22	10~0
Ambient Temp. [°C]	43 T	43 T	32N	43 T	43 T	32N	43 T	43 T	32N
Refrigerant	R134A/R290	R404A/R290	R134A/R290	R134A/R290	R404A/R290	R134A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials	AISI304/AISI201								
Door Quantity	1			2			2		
Voltage / Frequency	220V / 50HZ . 220V / 60HZ , 110V / 60HZ								

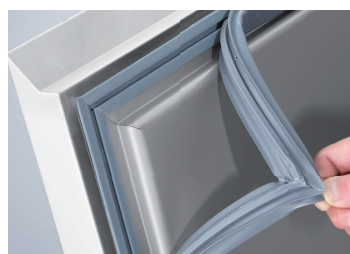

VENTILATED GN1/1 COUNTER



AWR1800L3 / AWF1800L3



AWR1800G



AWR2250L4 / AWF2250L4




AWR2250G

Model No.		AWR1800L3	AWF1800L3	AWR1800G	AWR2250L4	AWF2250L4	AWR2250G
Cooling Type		Ventilated					
Defrosting Type		Automatic					
Capacity	[L]	400			520		
Exterior Dimension							
Width	[mm]	1800	1800	1800	2250	2250	2250
Depth	[mm]	700	700	700	700	700	700
Height	[mm]	850	850	850	850	850	850
Temp. Range	[°C]	10~-2	-18~-22	10~0	10~-2	-18~-22	10~0
Ambient Temp.	[°C]	43 T	43 T	32N	43 T	43 T	32N
Refrigerant		R134A/R290	R404A/R290	R134A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials		AISI304/AISI201					
Door Quantity		3			4		
Voltage / Frequency		220V / 50HZ . 220V / 60HZ , 110V / 60HZ					



VENTILATED PIZZA RANGE

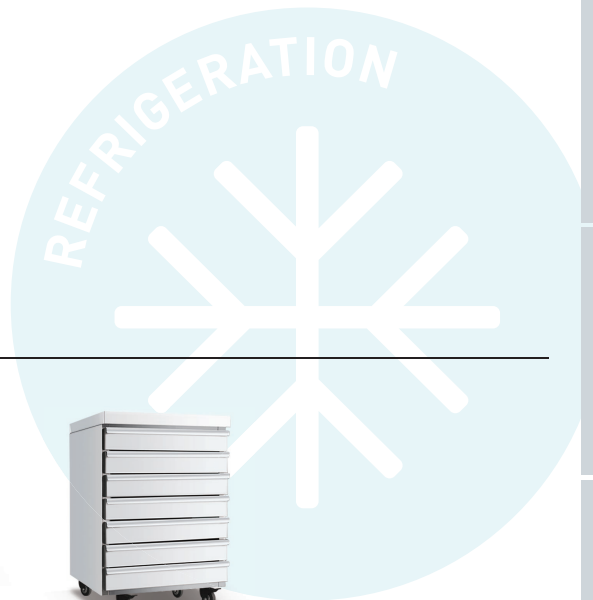

AWR1500PH



AWR2025PH



D7



AWR2025L3



AWR2025G



AWR2025D7




AWR2025D7PZ



AWR2025PZ

Model No.		D7	AWR1500PH	AWR2025PH	AWR2025L3	AWR2025G	AWR2025D7	AWR2025D7PZ	AWR2025PZ
Cooling Type		/	Ventilated			Ventilated		Ventilated	
Defrosting Type		/	Automatic			Automatic		Automatic	
Capacity	[L]	175	360	550	550	550	550	550	550
Exterior Dimension									
Width	[mm]	525	1500	2025	2025	2025	2025	2025	2025
Depth	[mm]	800	800	800	800	800	800	800	800
Height	[mm]	850	1070	1070	850	850	850	990	990
Temp. Range	[°C]	/	10~0	10~0	10~-2	10~0	10~-2	10~-2	10~-2
Ambient Temp.	[°C]	/	32N	32N	43 T	32N	43 T	43 T	43 T
Refrigerant		/	R134A/R290			R134A/R290		R134A/R290	
Ext & Int. Materials		/	AISI304/AISI201			AISI304/AISI201		AISI304/AISI201	
Door Quantity	Drawer Qty:7		2	3	3	3	2	2	3
Voltage / Frequency		/	220V / 50HZ. 220V/60HZ, 110V/60HZ						



SHOWCASE

BAKING

FOOD MACHINERY

STEAMING CABINET

DISINFECTION

DISHWASHERS

REFRIGERATION

VENTILATED

500L SERIES EN CABINET



ARX
AFX



AR2
AF2



AS0.5G
AF0.5G





AS0.5G2



ARF2

Model No.		ARX	AFX	AR2	AF2	AS0.5G	AF0.5G	AS0.5G2	ARF2
Cooling Type		Ventilated							
Defrosting Type		Automatic							
Capacity	[L]	500							
Exterior Dimension									
Width	[mm]	680	680	680	680	680	680	680	680
Depth	[mm]	760	760	760	760	760	760	760	760
Height	[mm]	1965	1965	1965	1965	1965	1965	1965	1965
Temperature Range	[°C]	10~-2	0~-18	10~-2	0~-18	10~0	0~-15	10~0	10~-2 0~-18
Ambient Temperature	[°C]	43 T	43 T	43 T	43 T	32N	32N	32N	43 T
Refrigerant		R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R134A/ R404A&R290
Ext & Int. Materials		AISI304/AISI201							
Door Quantity		1	1	2	2	1	1	2	2
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ							

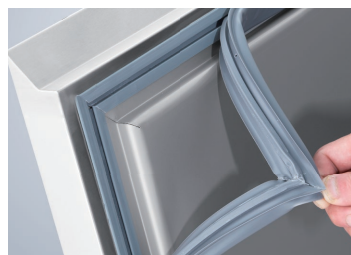

VENTILATED

1000L SERIES EN CABINET



ARX2 / AFX2



AR4 / AF4



AS1.0G2 / AF1.0G2



AS1.0G4

Model No.		ARX2	AFX2	AR4	AF4	AS1.0G2	AF1.0G2	AS1.0G4
Cooling Type		Ventilated						
Defrosting Type		Automatic						
Capacity	[L]	1000						
Exterior Dimension								
Width	[mm]	1220	1220	1220	1220	1220	1220	1220
Depth	[mm]	760	760	760	760	760	760	760
Height	[mm]	1965	1965	1965	1965	1965	1965	1965
Temperature Range	[°C]	10~-2	0~-18	10~-2	0~-18	10~0	0~-15	+10~0
Ambient Temperature	[°C]	43 T	43 T	43 T	43 T	32N	32N	32N
Refrigerant		R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials		AISI304/AISI201						
Door Quantity		2	2	4	4	2	2	4
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ						

VENTILATED EN COUNTER



AWR12 / AWF12



AWR12G




AWR15 / AWF15



AWR15G

Model No.		AWR12	AWF12	AWR12G	AWR15	AWF15	AWR15G
Cooling Type		Ventilated					
Defrosting Type		Automatic					
Capacity	[L]	260			380		
Exterior Dimension							
Width	[mm]	1200	1200	1200	1500	1500	1500
Depth	[mm]	750	750	750	750	750	750
Height	[mm]	800	800	800	800	800	800
Temp. Range	[°C]	10~-2	0~-18	10~0	10~-2	0~-18	10~0
Ambient Temp.	[°C]	43 T	43 T	32N	43 T	43 T	32N
Refrigerant		R134A/R290	R404A/R290	R134A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials		AISI304/AISI201			AISI304/AISI201		
Door Quantity		2			2		
Voltage / Frequency		220V / 50HZ . 220V / 60HZ , 110V / 60HZ					

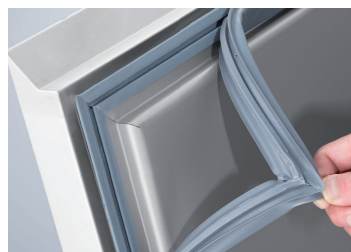

VENTILATED EN COUNTER



AWR18 / AWF18



AWR18G




AWR18 / AWF18



AWR18G

Model No.		AWR18	AWF18	AWR18G	AWR18	AWF18	AWR18G
Cooling Type		Ventilated					
Defrosting Type		Automatic					
Capacity	[L]	430			430		
Exterior Dimension							
Width	[mm]	1800	1800	1800	1800	1800	1800
Depth	[mm]	750	750	750	750	750	750
Height	[mm]	800	800	800	800	800	800
Temp. Range	[°C]	10~-2	0~-18	10~0	10~-2	0~-18	10~0
Ambient Temp.	[°C]	43 T	43 T	32N	43 T	43 T	32N
Refrigerant		R134A/R290	R404A/R290	R134A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials		AISI304/AISI201			AISI304/AISI201		
Door Quantity		2			3		
Voltage / Frequency		220V / 50HZ . 220V / 60HZ , 110V / 60HZ					

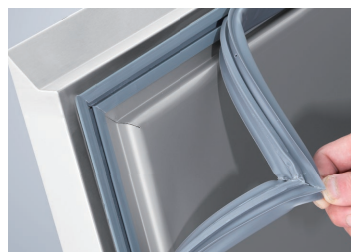

EN SERIES VENTILATED DOUBLE TEMPERATURE UPRIGHT CABINET

Features

The internally installed evaporator could keep more cooling air in the cabinet, nearly no cooling air loss.

Three-dimensional air duct design, the temperature more evenly in the cabinet

Automatic defrosting and drain water, no need manual operation.



Integral Foam



Air-Cooling System



Stainless Steel



Micro-Computer Control



Model No.	ARF41	
Cooling Type	Ventilated	
Defrosting Type	Automatic	
Capacity	[L]	970
Exterior Dimension		
Width	[mm]	1220
Depth	[mm]	830
Height	[mm]	1965
Temperature Range	[°C]	10~-2 / -3~-20
Ambient Temperature	[°C]	32N
Refrigerant	R134A/R404A	
Ext & Int. Materials	AISI304/AISI201	
Door Quantity	4	
Voltage / Frequency	[V/Hz]	220V/50HZ . 220V/60HZ . 110V/60HZ





COOLMES COMMERCIAL KITCHEN EQUIPMENT MFG CO.,LTD.

Headquarters: No. 9 Huateng Road, Huachuang Industrial Park, Panyu District, Guangzhou

Manufacture base: Meichu Industrial Park, Binzhou City

Sales Hotline: 0086-532-55579693 0086-20-37759856

Fax: 0543-2427 517

Website: www.meichu.com.cn

Email: mc@meichu.com.cn